

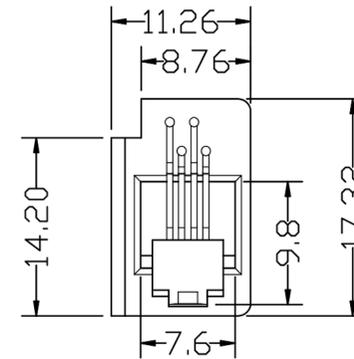

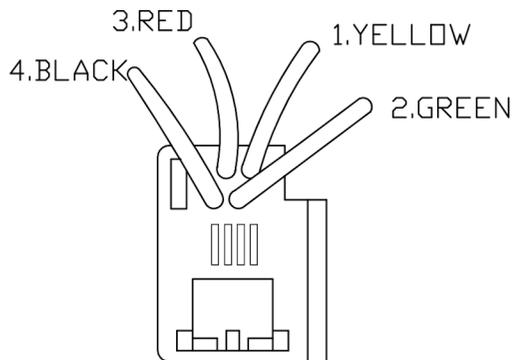


Unit: MM

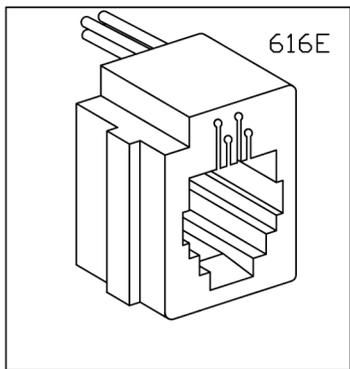

Tolerance for jack: $\pm 0.2\text{mm}$

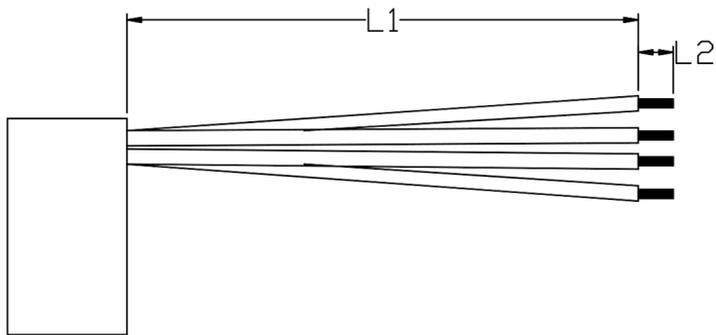

SPECIFICATION:

1. Electrical characteristics:-

- _Insulation Resistance:10M-ohm MIN
- _Contact Resistance:30M-ohm MAX
- _Rating Current:1.5A MIN
- _Dielectric Voltage:AC1.0KV 1 minute MIN

2. Physical Characteristics:-

- Housing:ABS Resin(UL94V-0)
- Colour:Grey,White,Black,Ivory
- WIRE:UL1061 26AWG
- Spring wire:Dia 0.46mm Phosphor Bronze over Nickel plate and with gold plating optional 3U",6U",15U",30U",50U"

UL FILE NO.E138872(N)



综乙实业有限公司
 CHUNG YI ENTERPRISE CO., LTD
 ISO-9001
 ISO-14001

Customer	CHUNG YI	Authorized By		第 共 一 一 页 页
P/N #	616E 4P4C	Approved By		
Model No.	616E WIREED LEAD JACK	Drawing By		